JOLT MOBILE OFFICES & CONTAINERS

20 ft office container — Alpine — spec sheet

JOLT 20 ft office · Alpine — joltrents.com · Prices from the JOLT Price Book of 2026-09-25

MONTHLY RENT	$1,895/mo per unit, before the damage waiver and environmental fee
MINIMUM TERM	3 months in Colorado 12 months for a job outside Colorado
RESERVATION DEPOSIT	$750 per unit, credited to the first invoice
DELIVERY WINDOW	2–4 weeks after the reservation
SIZE	20 ft long × 8 ft wide 160 sq ft on the ground
HEIGHT	8 ft 6 in
POWER	10 kWh battery pack that runs the HVAC No shore power required
HEAT AND COOLING	Mini-split heat and cooling Backup heat
BATHROOM	None
BUILT IN	WATCH CONNECT POWER
UPGRADES YOU CAN ADD	READY, $125/mo

WHAT THE CATALOG LISTS

- 20 ft ISO container office, 8 ft × 8 ft 6 in
- 36-inch steel personnel door, two barred slider windows
- Mini-split heat and cooling, 50-amp shore-power inlet
- Lights, outlets, vinyl-plank floor
- WATCH camera, CONNECT Starlink and POWER solar built in
- 10 kWh battery pack that runs the HVAC
- No shore power required
- Mountain envelope: matte black with cedar surrounds
- Standing-seam over-roof and covered entry deck
- Backup heat

SITE AND ACCESS


About 70 ft of straight-line truck clearance for a 20 ft unit (Rental Agreement §5.2).

A clear lane at least 12 ft wide, and a 16 ft gate opening where the truck turns.

Overhead: keep branches, wires and headers well above 14 ft 6 in; the tilting bed rises higher while it sets the unit.

A firm, level, well-drained surface, with utilities located and marked (Rental Agreement §5.2).

PLAN VIEW AND DELIVERY APPROACH (THE DXF AND SVG ARE DRAWN IN FEET)

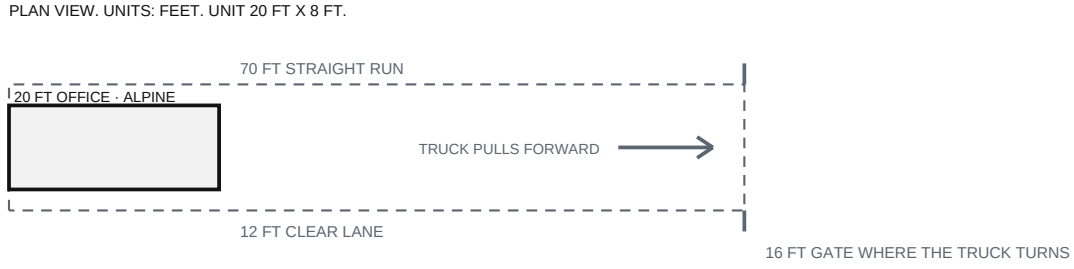

Not on this sheet: weights. The yard confirms them for your job — (888) 638-5658 or 970-279-1015.